

## Tapes & Labels

Adhesives tapes & labels are used in many different ways and for many different purposes in modern life. Bostik offers Hot-Melt Pressure Sensitive Adhesive solutions designed for specific end uses, and matching processing requirements. The adhesive can be tailored to customer application technologies and relevant substrates.

Bostik comprehensive range includes products for permanent, removable, cold temperature, freezer, filmic and high temperature labels and tapes.

### HOT MELT PSA FOR PERMANENT BONDING

Product	Usual coating weight (gsm)	Viscosity at 163°C (mPa.s)	R&B (°C)	SAFT* 1kg load (°C)	Minimum temperature of use of coated substrate (°C) **	Characteristics
TLH 4280 E	20-22	12 000	95	75	0	General purpose
TLH 4272 E	20-22	15 000	91	70	-5	General purpose
TLH 4253/1 E	20-22	8 000	75	65	9	Self-adhesive foams
TLH 4191/1 E	20-22	10 000	95	75	5	No Label Look. Filmic face
TLH 2970 E	20-22	20 000@177°C	72	-	5	Clear labels for beverage

### HOT MELT PSA FOR REMOVABLE APPLICATIONS


Product	Usual coating weight (gsm)	Viscosity at 163°C (mPa.s)	R&B (°C)	SAFT* 1kg load (°C)	Minimum temperature of use of coated substrate (°C) **	Characteristics
TLH 2355 E	20-35	11 000	96	62	- 28	High peel value

### HOT MELT PSA FOR SPECIALITIES

Product	Usual coating weight (gsm)	Viscosity at 163°C (mPa.s)	R&B (°C)	SAFT* 1kg load (°C)	Minimum temperature of use of coated substrate (°C) **	Characteristics
TLH 2013 E	15-50	4 500	95	77	16	Medical tapes and bandages
TLH 2211 E	>20	12 000@177°C	118	92	15	High temperature performance
TLH 2259 E	20-22	15 000	97	68	- 20	Freezer temperature application
TLH 2548 EM	35 –60	6 000	87	61	3	Tire label
TLH 8556 E	30-120	1 200 @120°C	54	-	< -30	Insect & rodent trap
TLH 2016 E	30-120	1 150 @120°C	69	-	< -20	Insect & rodent trap

\* SAFT - Shear Adhesion Failure Temperature

\*\* Minimum temperature of use is measured once the adhesive is applied at 20gsm on PET50µm.

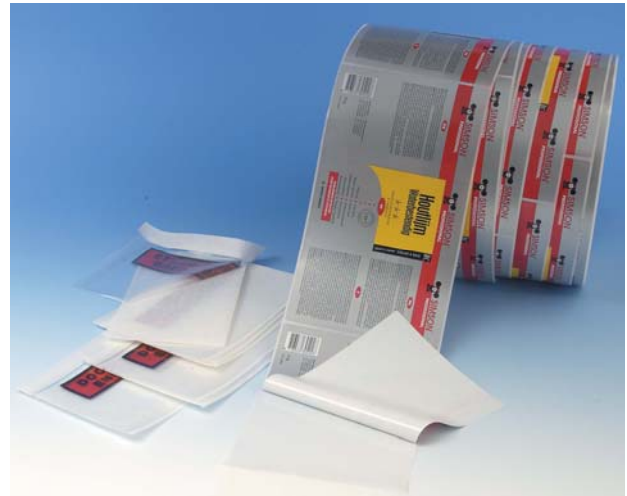

## PACKAGING

Different packaging options are available.  
For details or more information, please contact us.

[tapes.labels@bostik.com](mailto:tapes.labels@bostik.com)

## BOSTIK ADHESIVES AND SEALANTS

The **TOTAL** group is one of the world's leading Oil & Gas companies and was created in 1999 with the merger of French / Belgium company TotalFina and French company ELF.

The adhesive and sealant activities are brought together under the Bostik banner – an organisation with market-leader expertise in the adhesive and sealant technology field.

## ENVIRONMENTAL IMPACT

Our research and development efforts are, of course, driven by the needs of the marketplace. We place great emphasis on proving adhesive technologies through pilot programs that duplicate real world production situations.

Nevertheless, we are constantly looking for ways to make products that not only improve our customers' processes but also achieve a better environment for all of us.

## BOSTIK INFO

France - Bostik S.A. - 16-32, rue Henri Regnault - 92902 Paris la Défense – Fax : +33 (0) 1 47 96 90 92 - [infobuaro@bostik.com](mailto:infobuaro@bostik.com)



*BOSTIK is a Member of the FINAT Association*